
The Plate B reference.

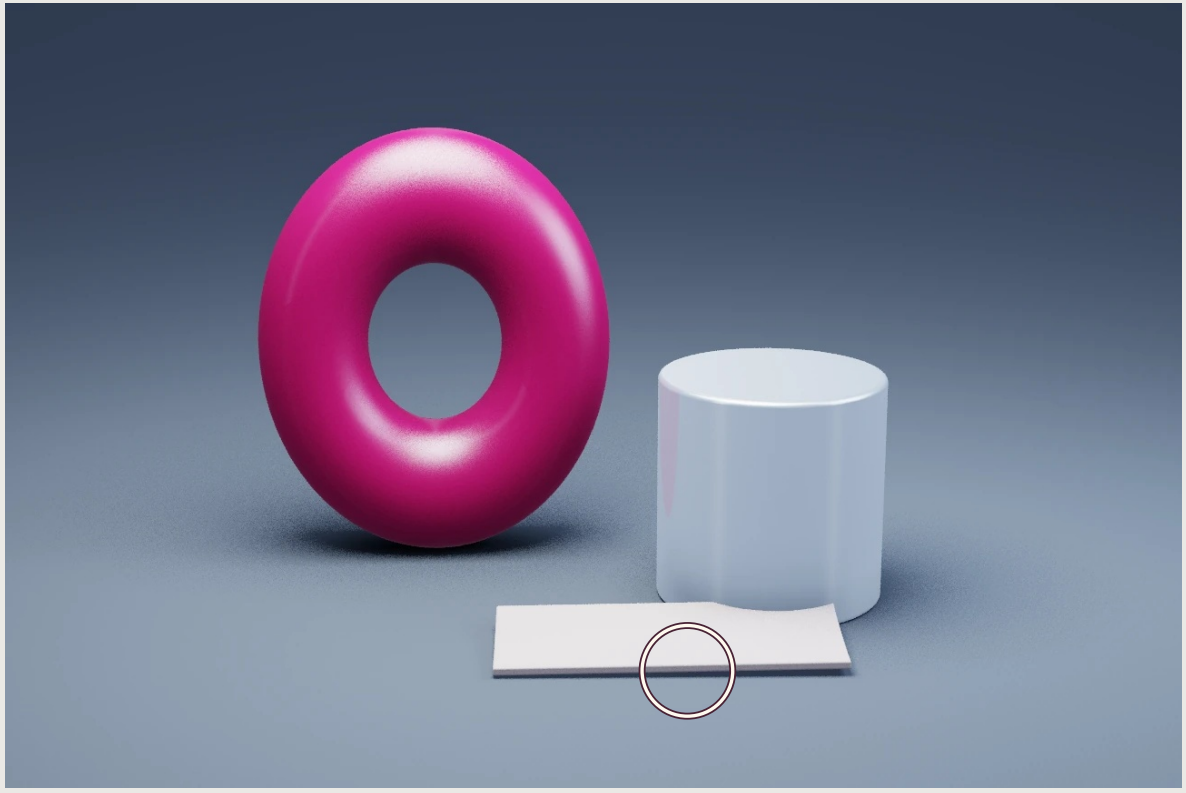

B / BROAD LIGHT 5600 K / High, camera left

On the first test

Use Plate B as the starting reference. Keep the broad reflection across the ring and the full ellipse on the cylinder. At the first test, check that the slim front edge of the pale card still separates from the ground.

SETUP NOTE

For a silhouette-led opener, compare this reference with Plate C (7200 K, camera right and behind).

Design prototype. Pre-rendered 1296 x 864 illustration. Illustrated source settings.